

IF A SEAL IS PRESENT ON THIS SHEET IT HAS BEEN ELECTRONICALLY SEALED AND DATED.

# MOBILE OPERATION ON DIVIDED OR MULTI-LANE HIGHWAYS

## GENERAL NOTES:

- 1. SPACING OF CMS BOARDS SHOWN ON PLANS ARE MINIMUM AND MAY BE ADJUSTED AS DIRECTED BY THE ENGINEER.
- 2. ALL EXISTING SIGNS THAT CONFLICT WITH THE PROPOSED TCP SHALL BE COVERED.  
(NO DIRECT PAY WILL BE MADE)
- 3. THERE WILL BE NO DIRECT PAY FOR RELOCATING CONSTRUCTION SIGNS.

## NOTES:

- (1) ALL CMS BOARDS SHALL CONTINUOUSLY BE MOVED BEHIND THE TMA AND WORK UNIT, AND ACCORDING TO THE PLANS OR AS DIRECTED BY THE ENGINEER. WHERE INSIDE SHOULDER WIDTH IS NOT AVAILABLE, CMS UNITS SHOULD BE PLACED AS FAR OFF THE RIGHT SHOULDER AS POSSIBLE.
- (2) 2 LANES MUST BE CLOSED AT A TIME TO PERFORM THIS WORK.

TRAFFIC CONTROL LEGEND

■

CHANNELIZERS / TRIMLINES

WORK UNIT OR WORK AREA

PROTECTIVE TRUCK WITH WORK SIGN, FLASHING ARROW PANEL AND TRUCK MOUNTED ATTENUATOR

[CMS]


CHANGEABLE MESSAGE SIGN

FLASHING ARROW PANEL


DISCLAIMER  
THE PROFESSIONAL WHOSE SIGNATURE AND PERSONAL SEAL APPEAR HEREON ASSUMES RESPONSIBILITY ONLY FOR WHAT APPEARS ON THIS PAGE, AND DISCLAIMS (PURSUANT TO SECTION 327.411 RSMO) SPECIFICATION, ESTIMATES, REPORTS, OR OTHER DOCUMENTS OR INSTRUMENTS NOT SEALED BY THE UNDERSIGNED PROFESSIONAL RELATING TO OR INTENDED TO BE USED FOR ANY PART OR PARTS OF THE PROJECT TO WHICH THIS PAGE REFERS.

STATE OF MISSOURI  
JEFFREY A. BOHLER  
REGISTERED PROFESSIONAL ENGINEER  
NUMBER E-29731  
4-3-12

EXHIBIT C  
TRAFFIC CONTROL  
SHEET 1 OF 3

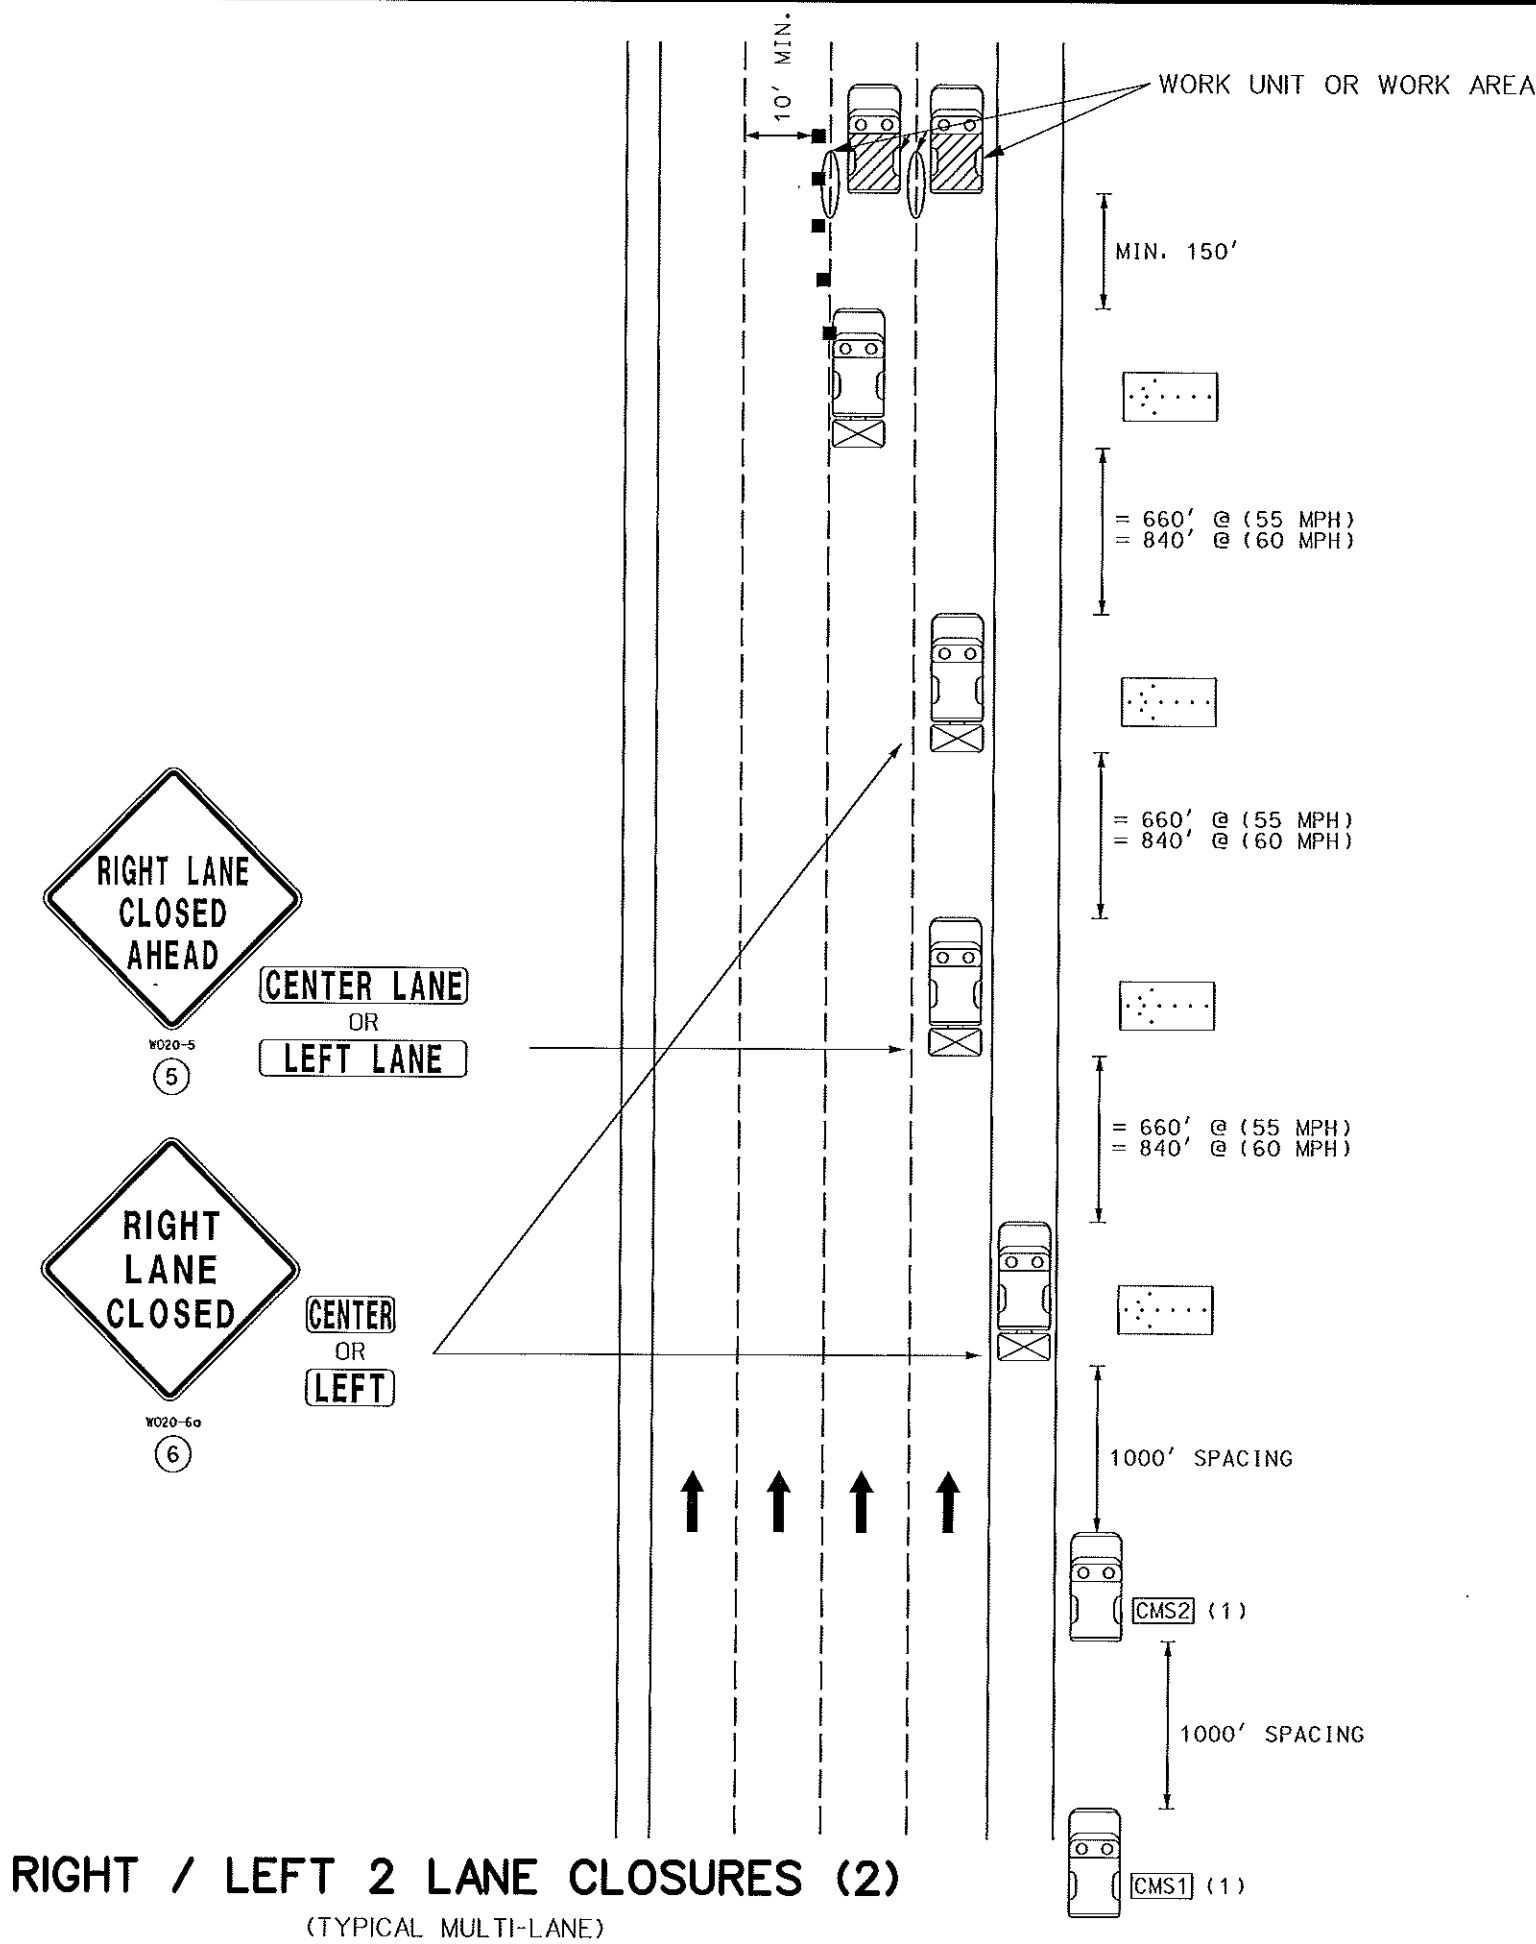


# TRAFFIC CONTROL DEVICES

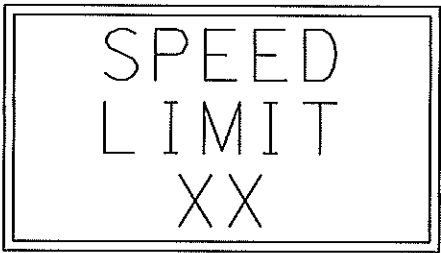


(SPEED LIMIT SHALL BE  
10MPH LESS THAN THE  
POSTED SPEED LIMIT)



(SIGN SEQUENCE)

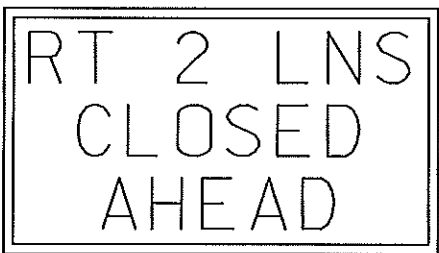

OR

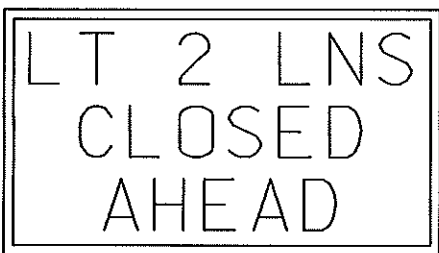


(SIGN SEQUENCE)

## TRAFFIC CONTROL LEGEND

■ CHANNELIZERS / TRIMLINES



WORK UNIT OR WORK AREA



PROTECTIVE TRUCK WITH  
WORK SIGN, FLASHING ARROW PANEL  
AND TRUCK MOUNTED ATTENUATOR



CHANGEABLE MESSAGE SIGN



FLASHING ARROW PANEL

### GENERAL NOTES:

1. SPACING OF CMS BOARDS SHOWN ON PLANS ARE MINIMUM AND MAY BE ADJUSTED AS DIRECTED BY THE ENGINEER.
2. ALL EXISTING SIGNS THAT CONFLICT WITH THE PROPOSED TCP SHALL BE COVERED.  
(NO DIRECT PAY WILL BE MADE)
3. THERE WILL BE NO DIRECT PAY FOR RELOCATING CONSTRUCTION SIGNS.
4. SPEED LIMIT SHALL BE 10MPH LESS THAN THE POSTED SPEED LIMIT.

### DISCLAIMER

THE PROFESSIONAL WHOSE SIGNATURE AND PERSONAL SEAL APPEAR HEREON ASSUMES RESPONSIBILITY ONLY FOR WHAT APPEARS ON THIS PAGE, AND DISCLAIMS (PURSUANT TO SECTION 327.411 RSMO) SPECIFICATION, ESTIMATES, REPORTS, OR OTHER DOCUMENTS OR INSTRUMENTS NOT SEALED BY THE UNDERSIGNED PROFESSIONAL RELATING TO OR INTENDED TO BE USED FOR ANY PART OR PARTS OF THE PROJECT TO WHICH THIS PAGE REFERS.

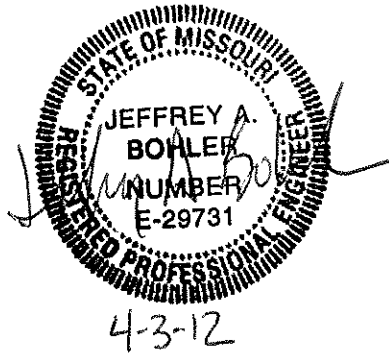


EXHIBIT C  
TRAFFIC CONTROL  
SHEET 2 OF 3

**GENERAL NOTES:**

FLUORESCENT ORANGE REFLECTIVE SHEETING SHALL IN ACCORDANCE WITH SEC 1042.2.7.3.


BALLAST FOR TRAFFIC CONTROL DEVICES SHALL CONFORM TO MANUFACTURERS' RECOMMENDATION FOR FIELD CONDITIONS WHEN APPLICABLE.

WHITE AND ORANGE REFLECTIVE SHEETING SHALL BE IN ACCORDANCE WITH SEC 1042.2.7.2.

IF REQUIRED BY THE ENGINEER OR SPECIFIED ON THE PLANS, EACH DIRECTION INDICATOR BARRICADE, DRUMLIKE CHANNELIZER, AND VERTICAL PANEL SHALL BE EQUIPPED WITH ONE TYPE C LED PORTABLE LIGHT UNIT. IF USED, THE LIGHT UNIT AND BATTERY COMPARTMENT SHALL BE FURNISHED BY THE DEVICE MANUFACTURER OR OTHERWISE MEET THE MANUFACTURER'S RECOMMENDATIONS FOR DESIGN AND WILL BE REQUIRED ON ALL DEVICES IN THE SERIES.

UPON APPROVAL OF THE ENGINEER, THE CONTRACTOR MAY, AT NO ADDITIONAL COST, USE DRUM-LIKE CHANNELIZERS IN LIEU OF TRIM-LINE CHANNELIZERS TO PROVIDE LONGITUDINAL CHANNELIZATION WITHIN THE ACTIVITY AREA WHERE NO RAMPS, INTERSECTIONS OR LIMITED LATERAL CLEARANCE EXISTS.



UPON APPROVAL OF THE ENGINEER, THE CONTRACTOR MAY, AT NO ADDITIONAL COST, USE VERTICAL PANELS IN LIEU OF TRIM-LINE CHANNELIZERS TO PROVIDE LONGITUDINAL CHANNELIZATION WITHIN THE ACTIVITY AREA.

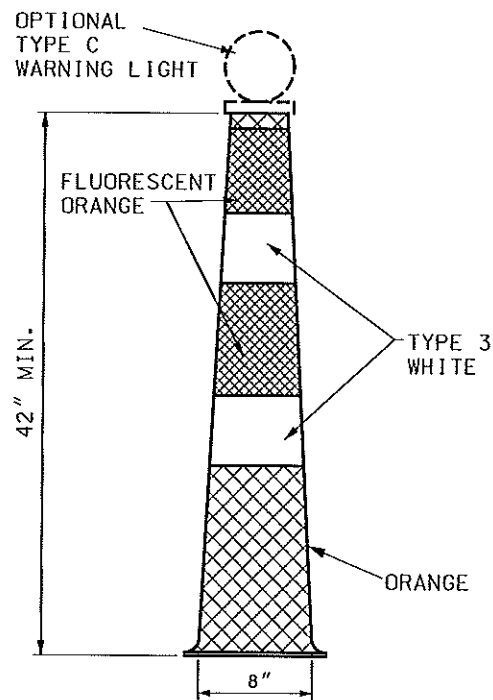


**TRIM-LINE  
CHANNELIZERS**

REFLECTIVE SHEETING APPLIED TO CHANNELIZERS SHALL BE REBOUNDABLE MEETING ASTM D 4956.

STRIPES ON TRIM-LINE CHANNELIZERS SHALL BE 6" TO 8".

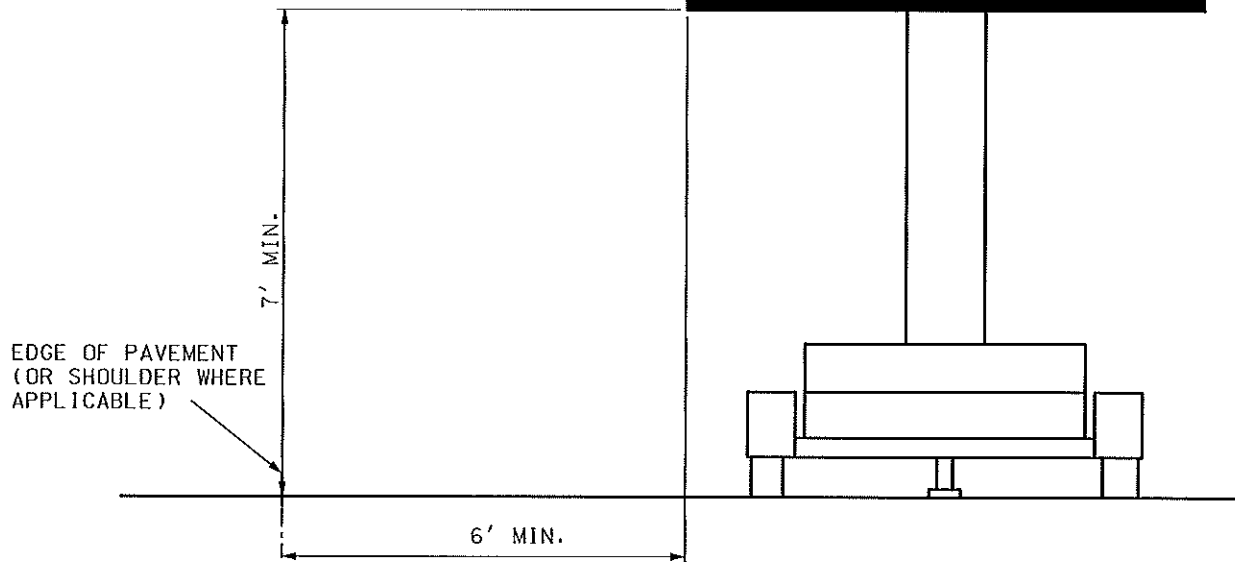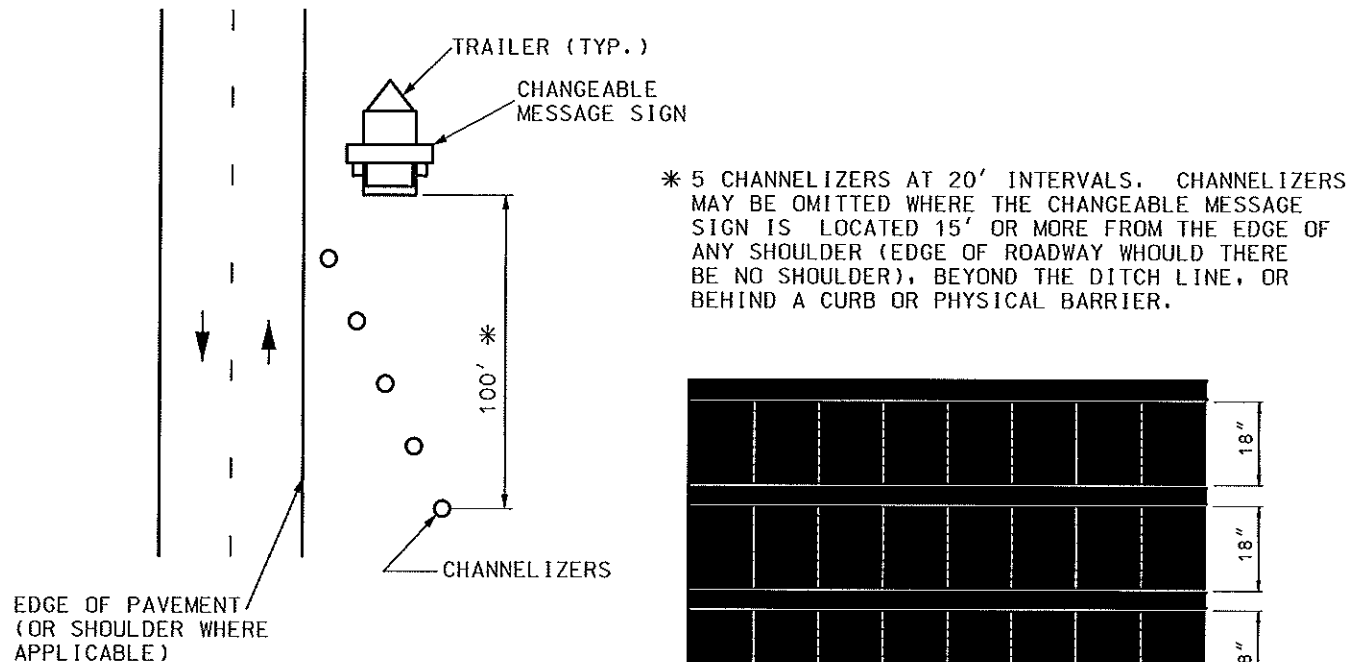


**CHANGEABLE MESSAGE SIGN**

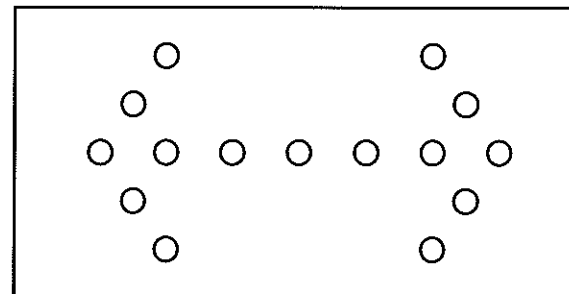

**FLASHING ARROW PANEL REQUIREMENTS**

PANEL MOUNTING HEIGHT SHALL BE AT LEAST 7 FEET FROM THE ROADWAY SURFACE TO THE LOWEST POINT ON THE PANEL. THE BOTTOM OF THE PANEL SHALL BE RELATIVELY LEVEL WHEN IN USE.

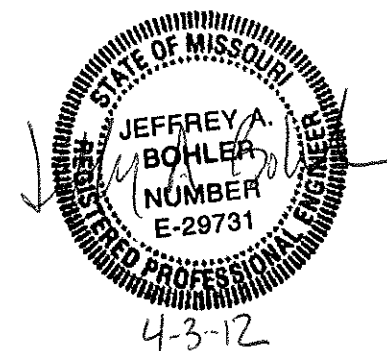

**EXHIBIT C  
TRAFFIC CONTROL  
SHEET 3 OF 3**